



25Gbps 100m Duplex LC SFP28 OPTX-SFP-25-SR

Product Features

- Supports 24.3Gbps to 28.1Gbps bit rates
- 850nm VCSEL Laser and PIN photo-detector
- Up to 70m on 50/125µm MMF(OM3)
- Up to 100m on 50/125µm MMF(OM4)
- Duplex LC receptacle optical interface compliant
- Hot pluggable
- All-metal housing for superior EMI performance
- RoHS6 compliant (lead free)
- Operating case temperature:
Commercial: -5°C to +70°C

Applications

- 25G SR
- 100G SR4 fan out to 4x25GE SR
- eCPRI

Standards


- Compliant with INF-8431
- Compliant with SFF-8472
- Compatible with IEEE802.3by

Description

The SFP28 transceivers are designed for use in 25-Gigabit data rate over multimode fiber. The transceivers are compatible with INF-8431 and SFF-8472. For further information, please refer to INF-8431 and SFF-8472.



Module Block Diagram

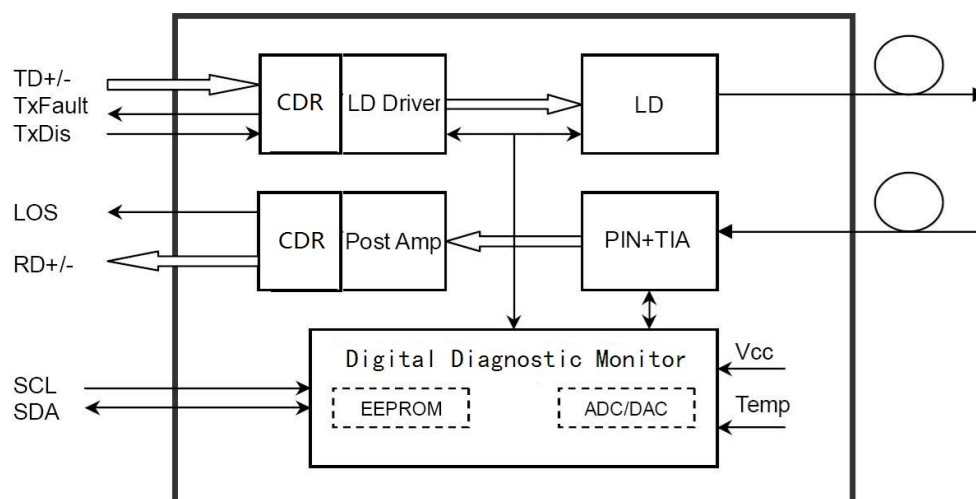

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit
Power Supply Voltage	V _{CC}	0		3.6	V
Storage Temperature	T _s	-40		+85	°C
Relative Humidity	RH	0		85	%
RX Input Average Power	P _{max}	-		3	dBm

Recommended Operating Environment

Parameter	Symbol	Min.	Typical	Max.	Unit
Power Supply Voltage	V _{CC}	3.13	3.3	3.46	V
Power Supply Current	I _{CC}			290	mA
Operating Case Temperature	T _C	-5		+70	°C
Data Rate			25.78		Gbps



Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Transmitter Section						
Input Differential Impedance	R_{in}	90	100	110	Ω	
Differential Data Input Swing	$V_{in\ PP}$	200		900	mV	1
Transmit Disable Voltage	V_D	$V_{cc} - 1.3$		V_{cc}	V	
Transmit Enable Voltage	V_{EN}	V_{ee}		$V_{ee} + 0.8$	V	
Receiver Section						
Differential Data Output Swing	$V_{out\ PP}$	400		900	mV	
LOS Fault	$V_{los\ fault}$	$V_{cc} - 0.5$		V_{cc_host}	V	2
LOS Normal	$V_{los\ norm}$	V_{ee}		$V_{ee} + 0.5$	V	2

Notes:

1. Connected directly to TX data input pins. AC coupling from pins into laser driver IC.
2. LOS is an open collector output. Should be pulled up with 4.7k Ω – 10k Ω on the host board. Normal operation is logic 0; loss of signal is logic 1.

Optical Parameters

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Transmitter Section						
Centre Wavelength	λ_c	840	-	860	nm	
Spectral Width (RMS)	σ			0.6	nm	
Average Optical Power (avg.)	P_{out}	-6.7		+2.4	dBm	1
Laser Off Power	P_{off}	-	-	-30	dBm	
Extinction Ratio	ER	2	-	-	dB	2
Relative Intensity Noise	RIN	-	-	-130	dB/Hz	
Optical Return Loss Tolerance		-	-	12	dB	



Vertical Eye Closure Penalty	CEVPQ			3.13	dB	
Output Optical Eye	Compliant with IEEE802.3by eye masks when filtered					2
Receiver Section						
Receiver Center Wavelength	λ_c	840	-	860	nm	
Receiver in Average Power		-10		2	dBm	
Receiver sensitivity(OMA)	Sen			-10	dBm	3
Los Assert	LOS _A	-26	-	-	dBm	
Los Dessert	LOS _D	-	-	-13	dBm	
Los Hysteresis	LOS _H	0.5	-	5	dB	
Overload	P _{in-max}	-	-	2	dBm	3
Receiver Reflectance		-	-	-12	dB	
Receiver Power (damage)		-	-	3	dBm	

Notes:

1. The optical power is launched into 50/125 μ m MMF.
2. Measured with a PRBS 2³¹-1 test pattern @25.78Gbps.
3. Measured with a PRBS 2³¹-1 test pattern @25.78bps, ER=4.8dB, BER <10⁻⁵.

Timing Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
TX_Disable Assert Time	t _{off}			100	us
TX_Disable Negate Time	t _{on}			2	ms
Time to Initialize	t _{start_up}			300	ms
Tx_Fault Assert	t _{fault_on}			1	ms
Tx_Fault Reset	t _{reset}	10			us
Rx_LOS Assert Delay	t _{los_on}			100	us
Rx_LOS Negate Delay	t _{los_off}			100	us
Clock Frequency	f _{SCL}	0		400	kHz



Digital Diagnostic Monitor Characteristics (DDM)

The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified. It is compliant to SFF8472 Rev10.2 with internal calibration mode. For external calibration mode please contact our sales staff.


Parameter	Symbol	Min.	Max.	Unit
Temperature Monitor Absolute Error	DMI_Temp	-3	3	°C
Laser Power Monitor Absolute Error	DMI_TX	-3	3	dB
RX Power Monitor Absolute Error	DMI_RX	-3	3	dB
Supply Voltage Monitor Absolute Error	DMI_VCC	-3%	3%	V
Bias Current Monitor Absolute Error	DMI_Ibias	-10%	10%	mA

Digital Diagnostic Memory Map (Compliant with SFF-8472)


The transceivers provide serial ID memory contents and diagnostic information about the present operating conditions by the 2-wire serial interface (SCL, SDA).

The diagnostic information with internal calibration or external calibration all are implemented, including received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring.

The digital diagnostic memory map specific data field defines as following (For further information, please refer to SFF-8472).

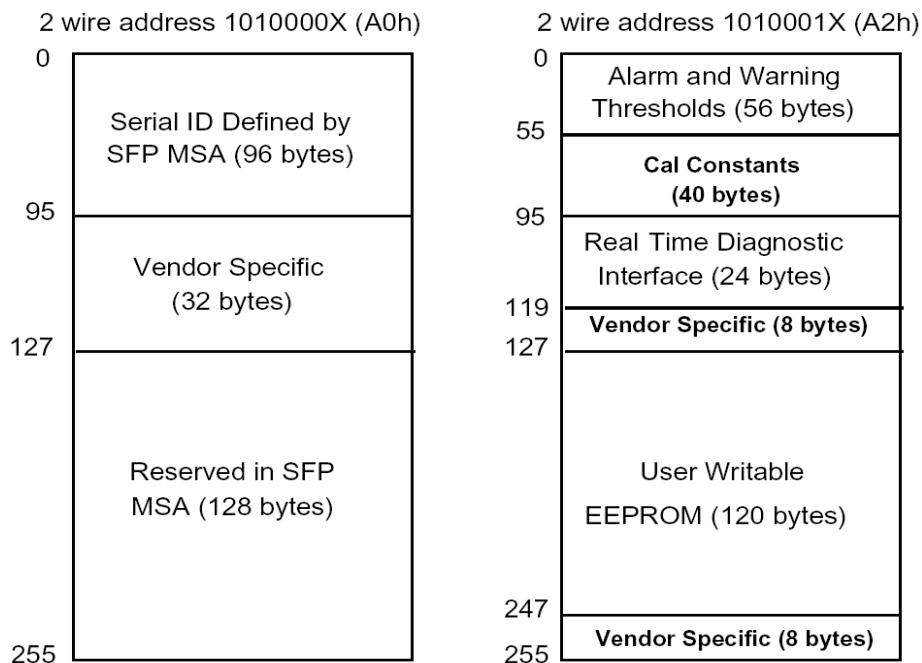

Pin Definitions

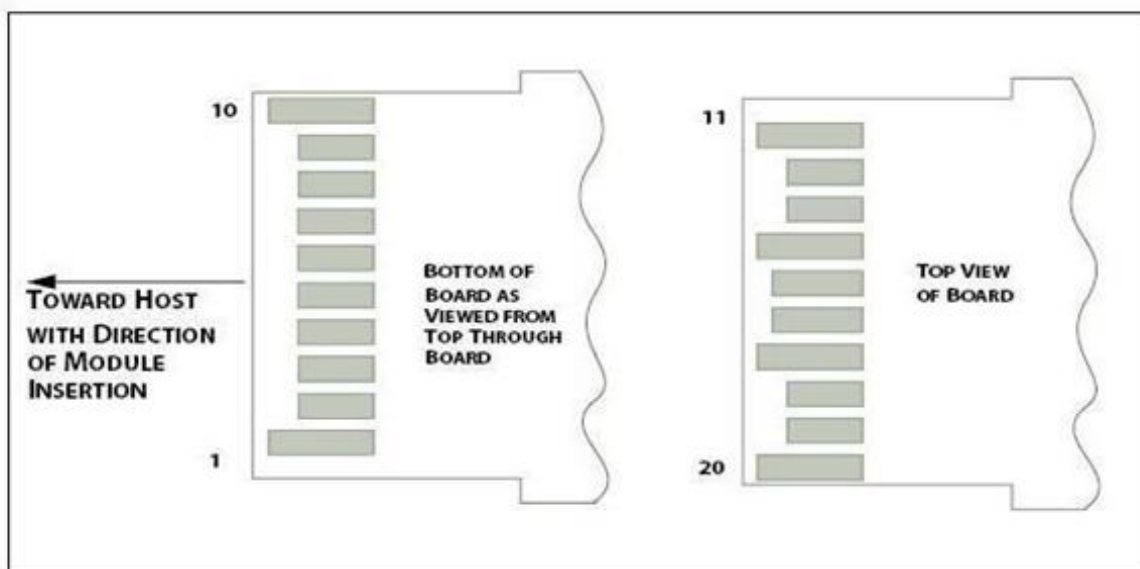

SFP+ module contact assignment



Pin Descriptions

Pin	Signal Name	Description	Plug Seq.	Notes
1	VeeT	Module Transmitter Ground	1	1
2	TX FAULT	Module Transmitter Fault	3	
3	TX Disable	Transmitter Disable; Turns off transmitter laser output	3	
4	SDA	2-Wire Serial Interface Data Line	3	2
5	SCL	2-Wire Serial Interface Clock	3	2
6	Mod_ABS	Module Definition, Grounded in the module	3	
7	RS0	Receiver Rate Select (not used)	3	
8	LOS	Receiver Loss of Signal Indication Active LOW	3	
9	RS1	Transmitter Rate Select (not used)	3	
10	VeeR	Module Receiver Ground	1	1
11	VeeR	Module Receiver Ground	1	1
12	RD-	Receiver Inverted Data Output	3	
13	RD+	Receiver Non-Inverted Data Output	3	
14	VeeR	Module Receiver Ground	1	1
15	VccR	Module Receiver 3.3 V Supply	2	
16	VccT	Module Transmitter 3.3 V Supply	2	
17	VeeT	Module Transmitter Ground	1	1
18	TD+	Transmitter Non-Inverted Data Input	3	
19	TD-	Transmitter Inverted Data Input	3	
20	VeeT	Module Transmitter Ground	1	1

Notes:


Plug Seq.: Pin engagement sequence during hot plugging.

1. Module ground pins GND are isolated from the module case.

2. Shall be pulled up with 4.7K-10Kohms to a voltage between 3.15V and 3.45V on the host board.




Recommended Power Interface Circuit

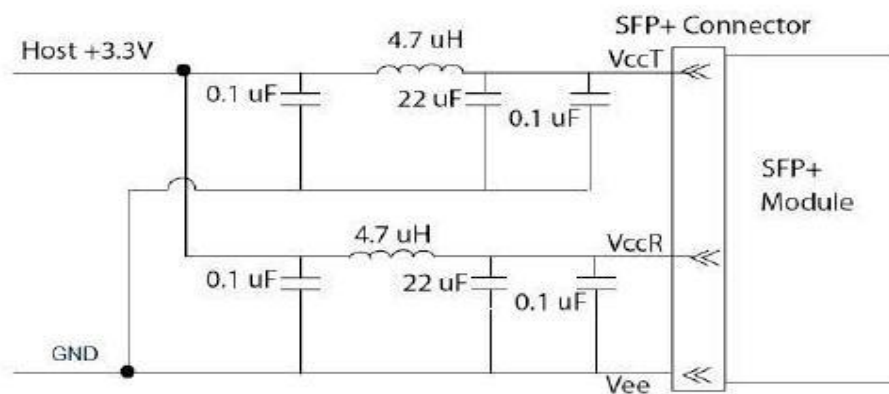


Host Board Power Supply Filters Circuit



Recommended Interface Circuit

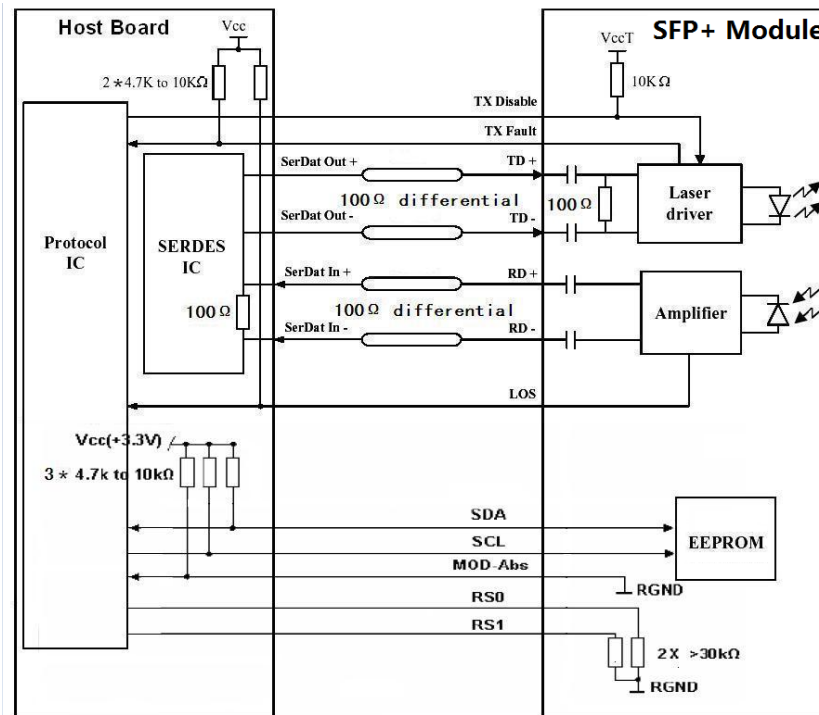

Mechanical Dimensions

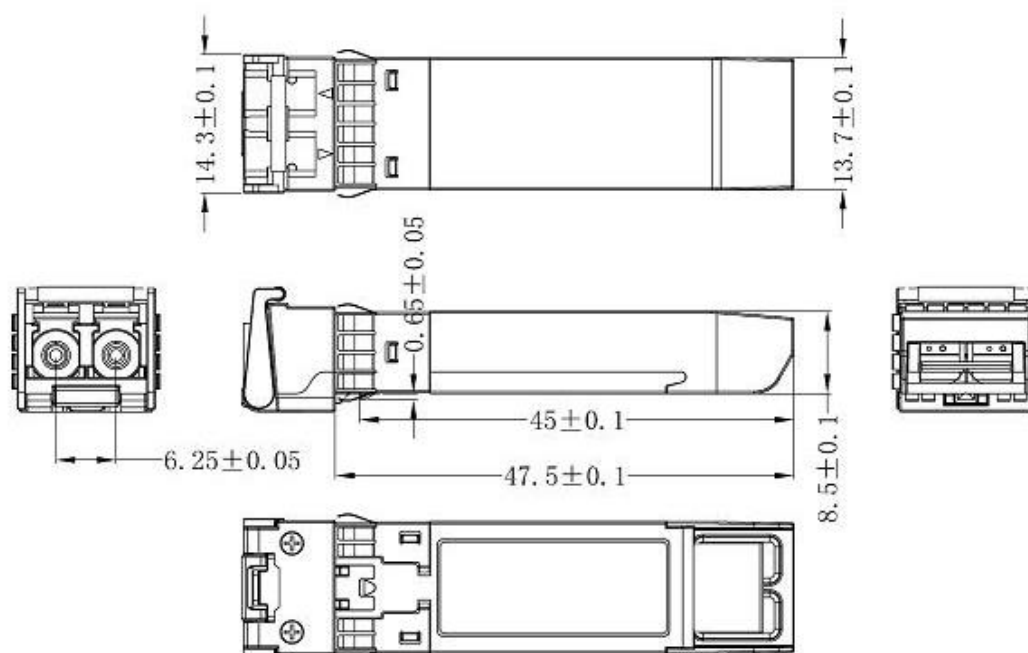



Ordering information

Part Number	Product Description
For: Commercial	850nm, 25Gbps, 100m (MMF OM4), Duplex LC SFP28 Transceiver, -5°C ~ +70°C, With DDM.

References

1. “Specifications for Enhanced Small Form Factor Pluggable Module SFP+”, SFF-8431, Rev 4.1, July 6, 2009.
2. “Improved Pluggable Form factor”, SFF-8432, Rev 4.2, Apr 18, 2007.
3. “Diagnostic Monitoring Interface for Optical Transceivers” SFF-8472, Rev 10.2, June 1, 2007.
4. IEEE802.3by.

NOTICE:

OptiX² reserves the right to make changes to this product in this specification without notice, in order to improve product performance

